

φ172mm

San Ace 172W

51mm thick (Sidecut type 9WG type)

51mm thick (Sidecut type 9WE type)

51mm thick (Round type 9WE type)



General Specifications

- Material Frame: Aluminum,
Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (Indoor, L10:Survival rate: 90% at 60°C,
rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black or blue (Sensor) yellow
- Storage Temperature -30°C to +70°C (Non-condensing)

φ172mm×51mm (Mass : 890g) **IP 68** **9WE type** **Round type**


Specifications

The following nos. have pulse sensors.


Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9WE1724K501	24	20.4 to 27.6	1.3	31.2	4,100	8.5 300.1	243 0.97	55	- 20 to + 60	40,000

Some models can also be equipped without sensors as an option. Please refer to the index (pp. 417 to 437).

Dimensions (unit : mm)

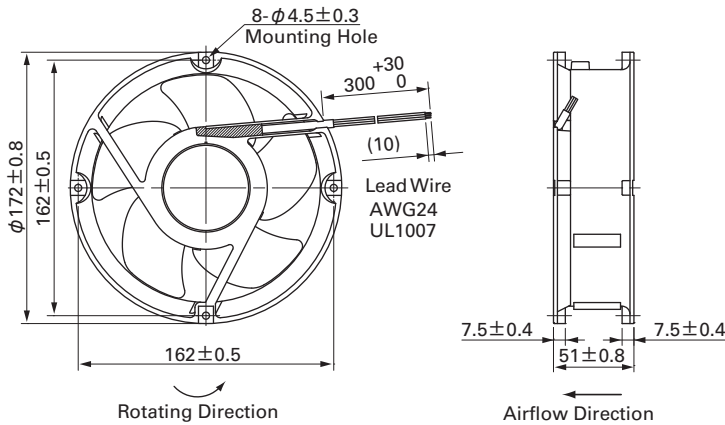

Reference Dimension of Mounting Holes and Vent Opening (unit : mm)

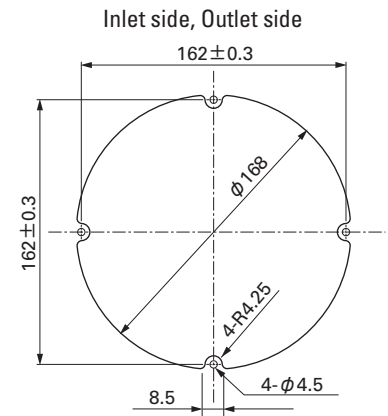


Options (unit : mm)


Finger Guards

Model : 109-1066 Surface treatment : Nickel-chrome plating (silver) Color : silver Model : 109-1068 Surface treatment : Nickel-chrome plating (silver) Color : silver

Inlet side, Outlet side

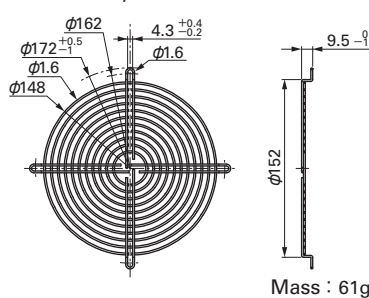


Outlet side

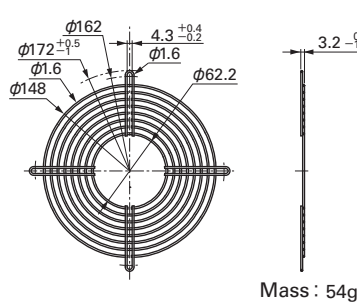


Model : 109-319E Surface treatment : Nickel-chrome plating (silver) Color : silver Model : 109-319H Surface treatment : Cation electropainting (black) Color : black


Inlet side, Outlet side

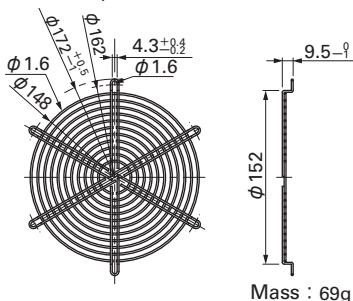

Outlet side



Airflow - Static Pressure Characteristics

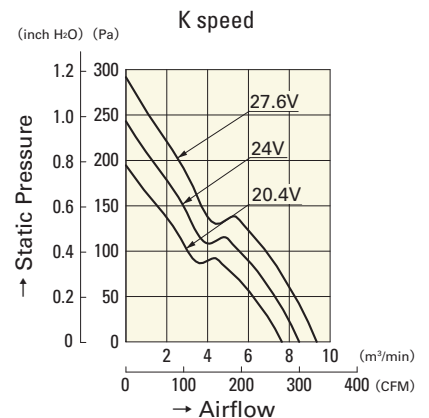

9WE1724K501